

Varimixer

FLEXLIFT INOX

EASY HANDLING After mixing, the bowl is lifted directly out of the mixer, driven to the workplace and lifted up to appropriate working height for portioning of the contents.

BOWL HANDLING The Flexlift Inox seizes with two arms around the bowl.

BOWL SIZES The Flexlift Inox handles bowls from 30 to 80L.

BOWL ROTATION The turning unit is used for making sideways rotation of the bowl.

EASY TRANSPORTATION Flexlift Inox handles all lifts of bowls and is easy to drive around in the kitchen.

OVERLOAD PROTECTION The lift is equipped with automatic over-load switch.


FLEXLIFT HEIGHT The Flexlift Inox is available in two mast heights - 1.98 m and 2.41 m.

BATTERY POWERED The Flexlift Inox lift will enhance efficiency in your work processes and ensure health and safety.

MAXIMUM LOAD Flexlift Inox moves, lifts and handles loads of up to 80 kg simply and efficiently.

EASY OPERATION Lifting and lowering is done electrically and is operated from a remote control.

WHEN NOT IN USE When Flexlift Inox is not in use, it can be parked under the table.

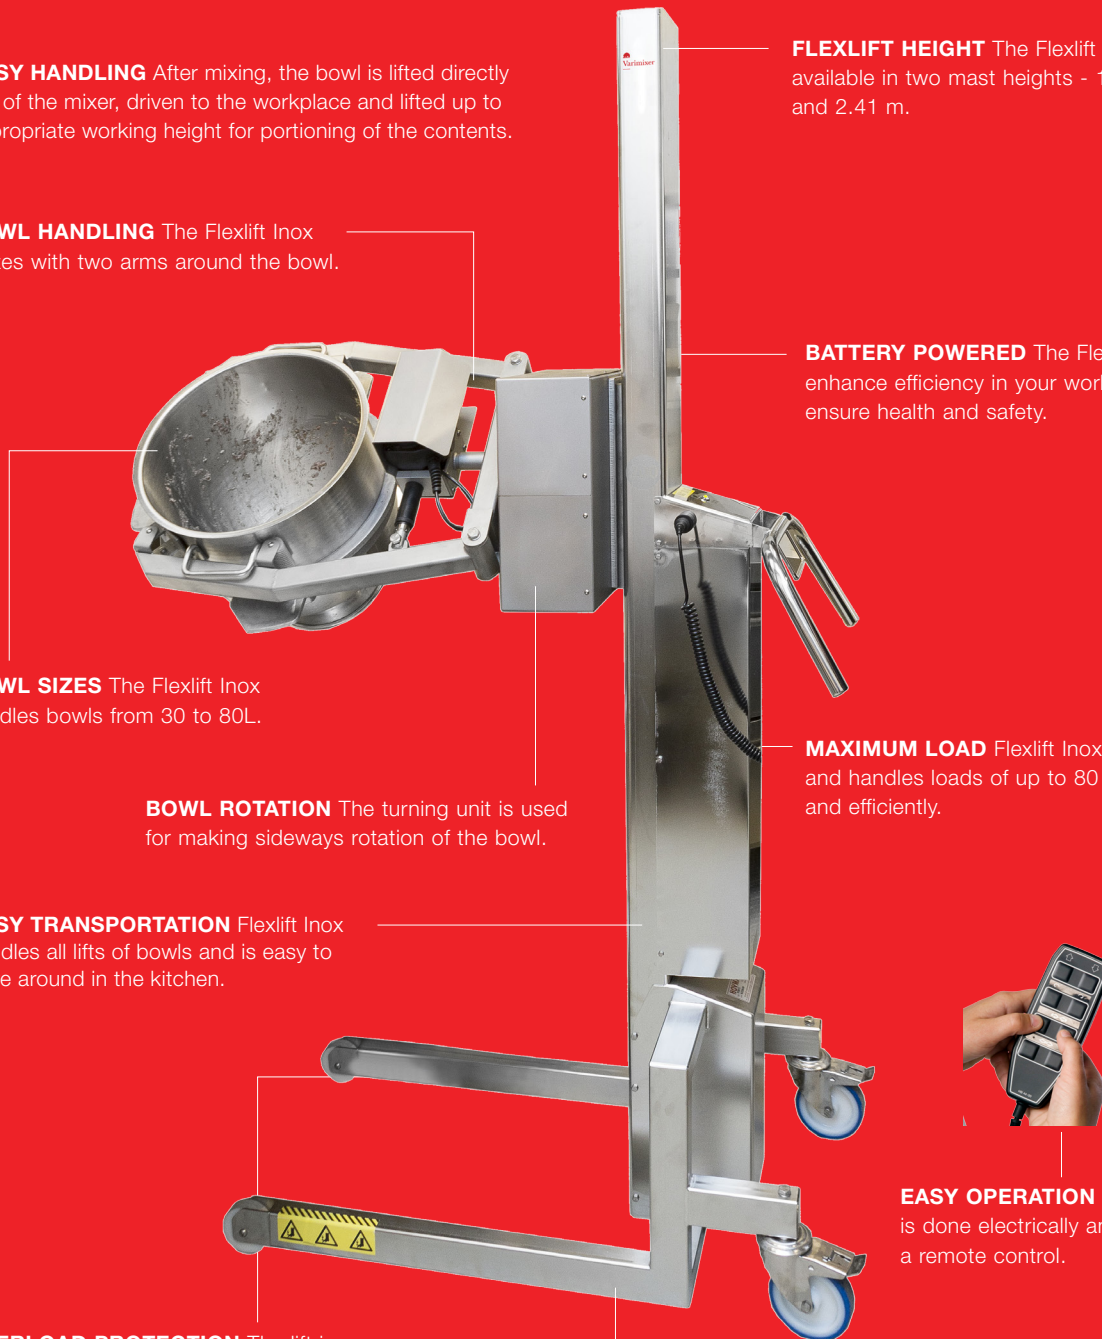

VARIMIXER FLEXLIFT INOX

Mast is made of electro polished stainless steel (1.4301).
Handle is made of electro polished stainless steel (1.4301).
Sledge is made of electro polished stainless steel (1.4301).
Front cover is made of electro polished stainless steel (1.4301).
Plug for remote is made of polyacetal
Remote is made of polyamide 6
Wheel frame is made of electro polished stainless steel (1.4301).
Front wheels are made of polyacetal
Back wheels are made of stainless steel, polyamide and polyurethane
Charger: 230V, 2 Amps






CERTIFICATIONS



VARIMIXER FLEXLIFT INOX

Bowl size	30 - 80 L
Maximum load	80 kg
Net weight Flexlift Inox M	75 kg
Net weight Flexlift Inox H	79 kg
H x W x L Flexlift Inox M	1980 x 555 x 1187 mm
H x W x L Flexlift Inox H	2410 x 555 x 1187 mm
Batteries	24V, 18 Ah
Charging time (100%)	8 hrs.
Sound pressure level	≤ 70 Db(A)
Vibration strength	≤ 2.5 m/s ²
IP code	IP66

DIMENSIONS

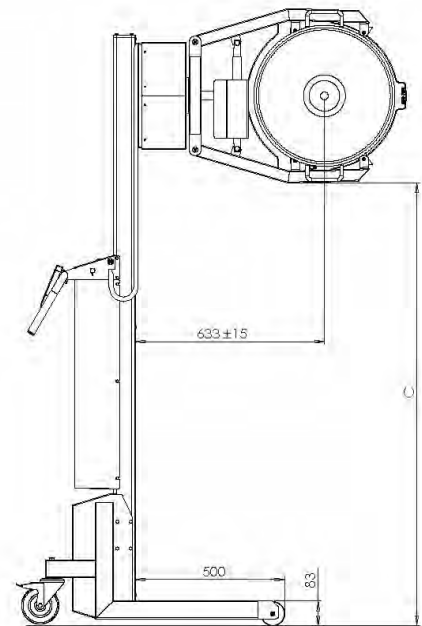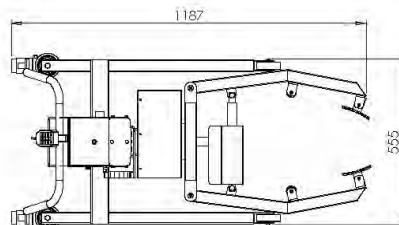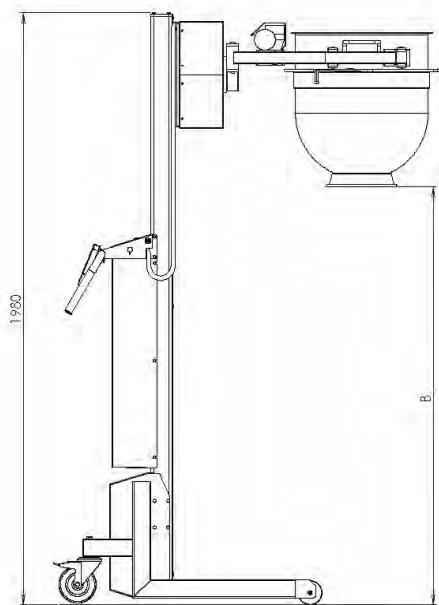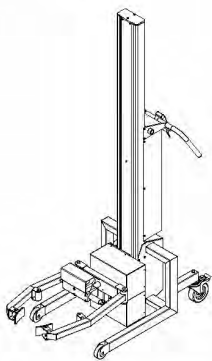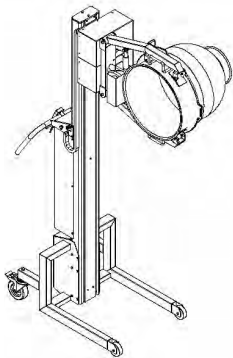

B=	
30L.	1510mm.
40L.	1440mm.
40/20L.	1540mm.
60L.	1395mm.
60/30L.	1500mm.
80/L.	1405mm.
80/40L.	1440mm.

C=	
30L.	1520mm.
40L.	1505mm.
40/20L.	1505mm.
60L.	1480mm.
60/30L.	1505mm.
80/L.	1450mm.
80/40L.	1505mm.



Varimixer

Varimixer A/S
Kirkebjerg Søpark 6
DK-2605 Brøndby
P: +45 4344 2288
E: info@varimixer.com
www.varimixer.com